

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 87118863.7

(51) Int. Cl. 4: C08J 5/18, C08G 63/66,
C08G 63/18

(22) Date of filing: 18.12.87

(30) Priority: 19.12.86 JP 305083/86
 29.12.86 JP 313318/86
 25.06.87 JP 159412/87
 25.11.87 JP 296890/87
 25.11.87 JP 296891/87
 18.12.87 JP 322217/87

(43) Date of publication of application:
 22.06.88 Bulletin 88/25

(84) Designated Contracting States:
 DE GB

(71) Applicant: Toyo Boseki Kabushiki Kaisha
 No 8, Dojimahamadouri 2-chome Kita-ku
 Osaka-shi, Osaka-fu(JP)

(72) Inventor: Yoshinaka, Yasuo
 192-146, Takashiro Shiga-cho
 Shiga-gun Shiga-ken(JP)
 Inventor: Kuze, Katsuaki
 360-80, Mano-cho
 Shiga-ken(JP)
 Inventor: Isaka, Tsutomu
 2-1-4, Shinooka
 Komaki-shi Aichi-ken(JP)
 Inventor: Yamashita, Toshihiro
 344, Aza Maehata Oaza Kizu
 Inuyama-shi Aichi-ken(JP)
 Inventor: Matsuyama, Yujiro
 2-2-609, Nionhama 2-chome
 Otsu-shi Shiga-ken(JP)
 Inventor: Nakamura, Koichiro
 270-8, Waninaka Shiga-cho
 Shiga-gun Shiga-ken(JP)
 Inventor: Matsunaga, Tsuyoshi
 57-47-1, Sada Mihama-cho
 Mikata-gun Fukui-ken(JP)
 Inventor: Makimura, Osamu
 1812-5, Miwa-cho
 Ogaki-shi Gifu-ken(JP)

(74) Representative: Vossius & Partner
 Siebertstrasse 4 P.O. Box 86 07 67
 D-8000 München 86(DE)

EP 0 271 928 A2

(54) Thermo-shrinkable polyester film.

(57) A thermo-shrinkable polyester film of this invention is obtained from a composition that comprises acid components including terephthalic acid and glycol components including ethyleneglycol. The polyester film has a heat-shrinkage ratio of 30% or more in a certain direction at 100°C, and a shrinkage ratio of 5% or more at the point of intersection of a curve showing the internal shrinkage stress of the film and a curve showing the tensile stress of the film.

THERMO-SHRINKABLE POLYESTER FILMBACKGROUND OF THE INVENTION

1. Field of the invention:

5 This invention relates to a thermo-shrinkable film that is suitable for use as a wrapping material to be used as a covering, to hold objects together, as an outer wrapping, etc. In particular, it relates to a polyester-type film (here and below, the word "film" also includes the meaning "sheet") with thermoshrinkable properties that is suitable for use as a wrapping material.

2. Description of the prior art:

15 Thermo-shrinkable plastic films are used as coverings, to hold objects together, and as an outer wrapping for bottles (including both glass and plastic bottles), cans, and other kinds of containers, and for cylindrical objects (pipes, rods, wood, and other kinds of cylindrical objects). For example, such films are used for covering the cap, shoulder, or bulge of bottles, or for the entire bottle, for the purpose of labelling, protection, parceling, or increasing the value of the product, and for other reasons. In addition, there is the use of such films as a covering to package such objects as boxes, bottles, boards, rods, or notebooks
20 together in groups, and there is also the use in which a film is attached closely as a wrapping. The uses mentioned above make use of the shrinkability and the shrinking stress of the film.

As the material for the film mentioned above, polyvinylchloride, polystyrene, polyethylene, hydrochlorinated rubber, etc. can be used. Usually, these films are made into a tube shape, and after being wrapped around a bottle or around more than one pipe, for example, the film is shrunk by the application of
25 heat so as to wrap or parcel together the object or objects.

However, the conventional thermo-shrinkable plastic films described above have the following disadvantages.

30 (a) One-axis shrinkability

When the thermo-shrinkable films mentioned above are, for example, wrapped around a bottle and shrunk around the circumference of the bottle so as to make a label, it is desirable that the films can shrink greatly in one specific direction (around the bottle), and not shrink in the direction at right angles to this
35 direction (that is, the long axis of the bottle). To increase the shrinkability of the film like this in one direction only, it is effective to stretch the films so as to orient the polymer molecules that form the film in the said direction. However, when the polymer molecules are oriented, the film readily splits, and in addition, because fibrillation has become easier, the strength of the film decreases. In particular, if the bottle mentioned above is dropped, the strength of the film in the direction of the long axis of the bottle is
40 important for prevention of breaking of the bottle, and therefore an oriented polymer film obtained by stretching in only one direction is not necessarily appropriate. In other uses, the property of conferring resistance to shock is often of importance, as well.

45 (b) Resistance to heat

The conventional films mentioned above cannot withstand either boiling or retorting, so they cannot undergo sterilization procedures at high temperatures. For example, if the conventional films mentioned above are retorted at high temperatures, they rupture during treatment.

(c) Printability

If, for example, polyvinylchloride film is printed by the half-tone process, its compatibility with the ink is poor. Also, because the heat-resistance of polyvinyl chloride is poor, polymer gel is likely to be formed in the film when the film is being made. Therefore, ink-pinholes form readily during printing because of these polymer gel. For that reason, during a continuous tube-formation and printing process, ink-pinholes develop in the long film. If this film is supplied to an automatic labeling machine, the product is formed with the pinholes still in existence, which requires a final inspection of all products, resulting in a decrease of productivity. If pinholes are eliminated by inspection after printing is finished, then, after the area with pinholes is cut out, the remaining portions are joined with adhesive tape, so that the film will once more be continuous. For this reason, products containing seams are made, so a step in which these unacceptable products are identified and removed becomes necessary.

With the conventional films mentioned above, there is shrinkage with the passage of time after manufacture, and this shrinkage causes a decrease in the pitch of printing, so that it is not possible to print with high accuracy. This shrinkage with time proceeds under a temperature at which the films are delivered. Therefore, shrinkable film made of polyvinyl chloride, etc., for example, must be stored in a low-temperature warehouse, or delivered by refrigerator car.

(d) Crazing

Crazing occurs readily with polyethylene film. Therefore, for example, if a chemical agent comes in contact with the film during use, the film is readily damaged. Crazing also gives rise to a rough surface for printing.

(e) Industrial waste pollution

When, for example, polyvinylchloride film is burned, hydrogen chloride gas is produced, giving rise to the problem of corrosion of the incinerator and of environmental pollution.

(f) Shrinkage spots

With the conventional films mentioned above, shrinkage in response to heat is often not uniform. When heating gives rise to some areas that are satisfactorily shrunken and also to areas with insufficient shrinkage, the surface of the film forms irregular protrusions and indentations, and does not fit to the object that it encloses. This tendency is particularly strong in high-speed wrapping, in which the heat-shrinkage occurs in a short period of time. If the film is printed with metallic ink, there is the demerit that conspicuous colored spots will form because of the uneven shrinkage.


SUMMARY OF THE INVENTION

The thermo-shrinkable polyester film of this invention overcomes the defects mentioned above of the conventional films and many other such defects as well.


The thermo-shrinkable polyester film of this invention is obtained from a composition that comprises acid components including terephthalic acid and glycol components including ethyleneglycol. The thermo-shrinkable polyester film has a heat-shrinkage ratio of 30% or more in a certain direction at 100°C, and has a shrinkage ratio of 5% or more at the point of intersection of a curve showing the internal shrinkage stress of the film and a curve showing the tensile stress of the film.

In a preferred embodiment, the film has a transformation ratio of 0.175 or more.

In a preferred embodiment, the glycol components include the compounds with the following general formulae (I) and/or (II) in the range of 3 to 65 percent by mole based on total moles of glycol components:

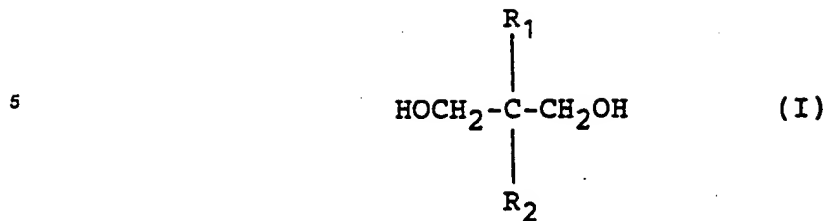

wherein R_1 and R_2 are independently C_1 - C_5 alkyl,

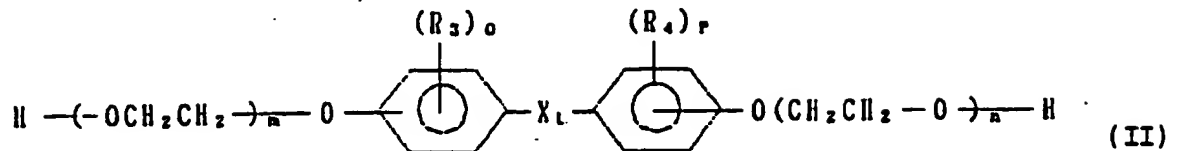


20

25

30

35

40

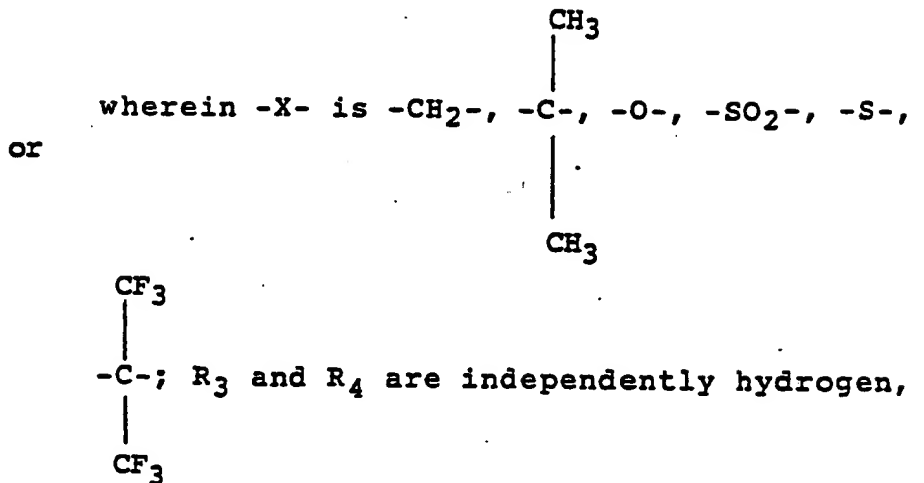

C_1 - C_5 alkyl, or halogen; l is 0 or 1, m and n are both an integer of 1 to 5; o and p are both an integer of 1 to 4.

Thus, the invention disclosed herein makes possible the objectives of:

- 1) providing a thermo-shrinkable film with large (40-70%) shrinkability in response to heat, by which, for example, a bottle that has a large diameter and a cap portion with a small diameter can readily be covered;
- 2) providing a thermo-shrinkable film that, in a fixed range of temperature, has sufficiently great shrinkage in a certain direction, and extremely slight shrinkage in the direction at right angles to the certain direction;
- 3) providing a thermo-shrinkable film that has high heat-shrinkage stress, so that when used, for example, to parcel objects together, its properties in holding the objects together are superior;
- 4) providing a film that can be shrunk at relatively low temperature, so that when shrunk at these low temperatures, the shape of plastic bottles made of polyester, polyethylene, polypropylene, polyvinylchloride, styrene, etc., will not be changed by the application of heat;
- 5) providing a thermo-shrinkable film that has great ability to maintain shrinkage stress, so that if there are areas that are shrunk too much and areas that are shrunk too little temporarily, by the application of heat, this condition can be corrected, so that a uniformly shrunk film can be obtained;

6) providing a thermo-shrinkable film that has excellent heat-resistance properties, so that it can withstand treatment by boiling or retorting;

7) providing a thermo-shrinkable film that has excellent compatibility with printing ink, which moreover does not give rise to pinholes in its printed surface when printed by the half-tone process;

8) providing a thermo-shrinkable film that does not change the pitch of printing by shrinking with the passage of time;

9) providing a thermo-shrinkable film that does not give rise to crazing, so that it is not damaged by chemical agents, etc.;

10) providing a thermo-shrinkable film that does not pollute the environment when burned, because it does not give off noxious gases when burned; and

11) providing a film the composition of which is the same as that of polyester bottles, so that when used bottles are collected and melted for reuse, the said film can be melted and reused in the same procedure together with the bottle.

BRIEF DESCRIPTION OF THE DRAWING


Figure 1 is a graph for use in the explanation of the specifications in this invention for the shrinkage ratio at the point of intersection.

DESCRIPTION OF THE PREFERRED EMBODIMENT


The thermo-shrinkable polyester film of this invention is obtained from a composition that comprises acid components including terephthalic acid and glycol components including ethyleneglycol.

The acid components mentioned above are largely terephthalic acid, but it is also possible to include other acid compounds provided that the properties of the film obtained are not changed so greatly as to move outside of a certain range. The acid components include, for example, dibasic fatty acids such as adipic acid, sebacic acid, azelaic acid; dibasic aromatic acids such as isophthalic acid, diphenyldicarboxylic acid, 5-tert-butylisophthalic acid, 2,2,6,6-tetramethylbiphenyl-4,4-dicarboxylic acid, 2,6-naphthalenedicarboxylic acid, and 1,1,3-trimethyl-3-phenylindene-4,5-dicarboxylic acid.

As the glycol components mentioned above, in addition to ethyleneglycol, the chemical compounds shown below in general formulae (I) and (II) are preferred for use:

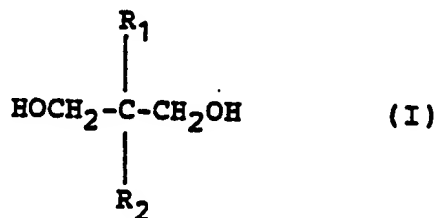

wherein R_1 and R_2 are independently C_1 - C_5 alkyl,

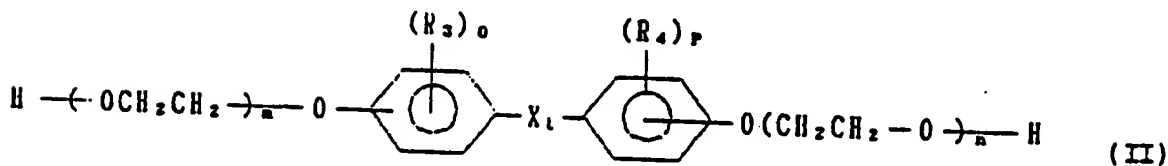

5 wherein -X- is -CH₂-, -C-, -O-, -SO₂-, -S-,
or

10

15

wherein -X- is -CH₂-, -C-, -O-, -SO₂-, -S-,
or

20

25

30

35

40

45

50

55

60

65

70

75

80

85

90

95

100

105

110

115

120

125

130

135

140

145

150

155

160

165

170

175

180

185

190

195

200

205

210

215

220

225

230

235

240

245

250

255

260

265

270

275

280

285

290

295

300

305

310

315

320

325

330

335

340

345

350

355

360

365

370

375

380

385

390

395

400

405

410

415

420

425

430

435

440

445

450

455

460

465

470

475

480

485

490

495

500

505

510

515

520

525

530

535

540

545

550

555

560

565

570

575

580

585

590

595

600

605

610

615

620

625

630

635

640

645

650

655

660

665

670

675

680

685

690

695

700

705

710

715

720

725

730

735

740

745

750

755

760

765

770

775

780

785

790

795

800

805

810

815

820

825

830

835

840

845

850

855

860

865

870

875

880

885

890

895

900

905

910

915

920

925

930

935

940

945

950

955

960

965

970

975

980

985

990

995

1000

1005

1010

1015

1020

1025

1030

1035

1040

1045

1050

1055

1060

1065

1070

1075

1080

1085

1090

1095

1100

1105

1110

1115

1120

1125

1130

1135

1140

1145

1150

1155

1160

1165

1170

1175

1180

1185

1190

1195

1200

1205

1210

1215

1220

1225

1230

1235

1240

1245

1250

1255

1260

1265

1270

1275

1280

1285

1290

1295

1300

1305

1310

1315

1320

1325

1330

1335

1340

1345

1350

1355

1360

1365

1370

1375

1380

1385

1390

1395

1400

1405

1410

1415

1420

1425

1430

1435

1440

1445

1450

1455

1460

1465

1470

1475

1480

1485

1490

1495

1500

1505

1510

1515

1520

1525

1530

1535

1540

1545

1550

1555

1560

1565

1570

1575

1580

1585

1590

1595

1600

1605

1610

1615

1620

1625

1630

1635

1640

1645

1650

1655

1660

1665

1670

1675

1680

1685

1690

1695

1700

1705

1710

1715

1720

1725

1730

1735

1740

1745

1750

1755

1760

1765

1770

1775

1780

1785

1790

1795

1800

1805

1810

1815

1820

1825

1830

1835

1840

1845

1850

1855

1860

1865

1870

1875

1880

1885

1890

1895

1900

1905

1910

1915

1920

1925

1930

1935

1940

1945

1950

1955

1960

1965

1970

1975

1980

1985

1990

1995

2000

2005

2010

2015

2020

2025

2030

2035

2040

2045

2050

2055

2060

2065

2070

2075

2080

2085

2090

2095

2100

2105

2110

2115

2120

2125

2130

2135

2140

2145

2150

2155

2160

2165

2170

2175

2180

2185

2190

2195

2200

2205

2210

2215

2220

2225

2230

2235

2240

2245

2250

2255

2260

2265

2270

2275

2280

2285

2290

2295

2300

2305

2310

2315

2320

2325

2330

2335

2340

2345

2350

2

20 C₁-C₅ alkyl, or halogen; l is 0 or 1, m and n are both an integer of 1 to 5; o and p are both an integer of 1 to 4

The chemical compounds shown above by general formula (I) include: neopentylglycol, 2-methyl-2-ethyl-1,3-propanediol, 2-methyl-2-n-propyl-1,3-propanediol, 2-methyl-isopropyl-1,3-propanediol, 2-methyl-2-n-butyl-1,3-propanediol, 2-methyl-2-n-heptyl-1,3-propanediol, 2-methyl-2-n-hexyl-1,3-propanediol, 2,2-diethyl-1,3-propanediol, 2-ethyl-2-n-propyl-1,3-propanediol, 2-ethyl-isopropyl-1,3-propanediol, 2-ethyl-n-butyl-1,3-propanediol, 2-ethyl-n-heptyl-1,3-propanediol, 2-ethyl-n-hexyl-1,3-propanediol, 2,2-di-n-propyl-1,3-propanediol, 2-n-propyl-2-n-butyl-1,3-propanediol, 2-n-propyl-2-n-heptyl-1,3-propanediol, 2-n-propyl-2-n-hexyl-1,3-propanediol, 2,2-di-n-butyl-1,3-propanediol, 2-n-butyl-2-n-heptyl-1,3-propanediol, 2-n-butyl-2-n-hexyl-1,3-propanediol, 2,2-di-n-heptyl-1,3-propanediol, 2-n-heptyl-2-n-hexyl-1,3-propanediol, 2,2-di-n-hexyl-1,3-propanediol, etc.

The chemical compounds shown above by general formula (II) includes: 2,2-bis(4-hydroxyethoxyphenyl)propane, bis(4-hydroxyethoxyphenyl)methane, bis(4-hydroxyethoxyphenyl)ether, bis(4-hydroxyethoxyphenyl)thioether, bis(4-hydroxyethoxyphenyl)sulfone, 2,2-bis(4-hydroxyethoxyphenyl)perfluoropropane, 2,2-bis(3-hydroxyethoxyphenyl)propane, 2,2-bis[3,5-dimethyl-(4-hydroxyethoxy)phenyl]propane, 2,2-bis[3,5-diethyl-(4-hydroxyethoxy)phenyl]propane, 2,2-bis[3,5-diisopropyl-(4-hydroxyethoxy)phenyl]propane, 2,2-bis[3,5-ditertbutyl-(4-hydroxyethoxy)phenyl]propane, 2,2-bis[3,5-dipentyl-(4-hydroxyethoxy)phenyl]propane, 2,2-bis[1-methyl-5-ethyl-(4-hydroxyethoxyphenyl)]propane, 2,2-bis[1-methyl-5-tertbutyl-(4-hydroxyethoxy)phenyl]propane, 2,2-bis[3-methyl-(4-hydroxyethoxy)phenyl]propane, 2,2-bis(3-secbutyl-(4-hydroxyethoxy)phenyl)propane, 2,2-bis[3-isopropyl-(4-hydroxyethoxy)phenyl]propane, bis[3,5-dimethyl-(4-hydroxyethoxy)phenyl]sulfone, bis[3,5-dimethyl-(4-hydroxyethoxy)phenyl]thioether, bis[3,5dimethyl-(4-hydroxyethoxy)phenyl]ether, [3,5-dimethyl(4-hydroxyethoxy)]diphenyl, bis[3,5-dimethyl-(4-hydroxyethoxy)phenyl]hexafluoropropane, 2,2-bis[3,5-dichloro-(4-hydroxyethoxy)phenyl]propane, 2,2-bis[3,5-dibromo-(4-hydroxyethoxy)phenyl]propane, bis[3,5-dibromo-(4-hydroxyethoxy)phenyl]sulfone, bis[3,5-dimethyl-(4-hydroxyethoxy)phenyl]methane, etc.

45 It is possible to include other glycol components provided that the properties of the film that is obtained are not changed so greatly as to move out of a certain range. The other glycol compounds includes: aliphatic diols such as diethyleneglycol, propyleneglycol, butanediol, hexanediol, etc.; alicyclic diols such as 1,4-cyclohexanedimethanol, etc., and aromatic diols such as xylyleneglycol, etc.

50 Polyester that includes the acid components and glycol components mentioned above can be prepared by a conventional method. That method may be, for example, the direct esterification method in which dicarboxylic acid and diol are allowed to react directly, or the transesterification method in which dicarboxylic acid dimethylester and diol are reacted.

The polyester obtained in this way is the main component of the polyester-containing compositions that form the film of this invention. In the compositions mentioned above, it is also possible to include other kinds of polyesters other than the one described above. By adjustment of the polyesters that are included, it is possible to obtain a thermo-shrinkable film that has the desired properties. Here, the glycol component shown by the above formulae (I) and/or (II) should be at the proportion of 65 mole % or less of the glycol components in all of the polyester, and preferably from 3 to 40 mole %, more preferably, it should be from

5 to 30 mole %. In particular, when the proportion of the glycol component used is 3 mole % or more, the property by which the film obtained has a large shrinkage ratio in a certain direction, with a small shrinkage ratio at right angles to that direction, is particularly striking. In addition, when the film obtained is shrunk by the application of heat, there is also the advantage that there is sufficient maintenance of internal stress. For that reason when, for example, a bottle is covered with the film, and the film is shrunk by the application of heat, after which there is sterilization of the bottle by heat treatment, there is no slackness at such places as the shoulder of the bottle. Even if these glycol components are present in excess amounts, the effects on, for example, the maintenance of internal stress mentioned above does not increase in proportion to the amount of glycol components. If there is an excess of glycol components, the film obtained is amorphous, and its resistance to heat decreases.

In the composition, it is also possible to include any kind of additive in addition to the polyester mentioned above. There are, for example, titanium dioxide, granulated silica, kaolin, calcium carbonate, and other lubricants; anti-static agents; age resistors; ultraviolet-light absorbants; pigments (dyes, etc.).

The intrinsic viscosity of the compositions obtained is 0.55-1.3 dl/g, and preferably 0.58-1.2 dl/g; more preferably, it should be 0.63-1.2 dl/g.

The above compositions are formed into a film by any well-known method (such as extrusion, the calendar method, etc.). The shape of the film is not restricted in any way; for example, it can be a flat sheet or a tube. The film obtained can be stretched under the fixed conditions described below, for example, in a certain direction by from 4 to 10 times the original measurements, and preferably within the limits of 4.6 to 7.0 times. In the direction at right angles to the said direction, the film can be stretched to 1 to 2 times the original measurements, and preferably within the limits of 1.1 times to 1.8 times. The order of stretching can be with either direction first. By stretching of the film in the direction at right angles to the main direction of stretching, the shock resistance of the film obtained is increased, and moreover, the property of tearing in one direction is modified. If the stretching ratio in the direction at right angles mentioned above exceeds 2 times, the ratio of thermo-shrinkage in the direction at right angles to the main shrinkage direction becomes too large, and the finished product after heat-shrinkage undulates so that it is not uniform. For the film stretched at the proportions of stretching mentioned above, in general, in relation to the shrinkage ratio in the main direction, the shrinkage ratio in the direction at right angles to the main direction is 15% or less, and preferably 8-9%, more preferably, it is 5% or less; or, the expansion ratio is 5% or less. When a film with such properties is heat-treated, the finished product is uniform.

The stretching method can be by any usual method. As this method, for example, there are the roll stretching method, the long-gap stretching method, the tenter-stretching method, and the tubular stretching method. With use of any of these methods, it is possible to do double-axis stretching in succession, simultaneous double-axis stretching, single-axis stretching, or a combination of these. With the double-axis stretching mentioned above, it is possible to do stretching in the horizontal and vertical directions at the same time; or else stretching can be done first in one direction and then in the other direction to result in effective double-axis stretching; stretching can be done first in either direction.

Preferably, in the stretching mentioned above, the following step is then taken. First, for example, the film mentioned above is preliminarily heated at a temperature in the range of a mean glass transition temperature (T_g) of the polymer composition constituting the film to $T_g + 80^\circ\text{C}$. Then, by a step that involves 9/10 or less of the total stretching process, stretching is done at the temperature of $T_g + 75^\circ\text{C}$ or less, and then, the remaining 1/10 or more of the procedure is done at $T_g + 60^\circ\text{C}$ or less, and preferably at $T_g + 50^\circ\text{C}$ or less. If treatment is done within the temperature limits given above at the time of stretching in the main direction (main direction of shrinkage), it is possible to control the thermo-shrinkage in the direction at right angles to the said direction. Moreover, with treatment in the temperature limits of $80 \pm 25^\circ\text{C}$, the heat-shrinkage ratio in the direction at right angles is approximately at its minimum.

In general, at the time of such stretching, heat setting takes place. For example, after stretching has taken place, it can be suggested that heating be done in the heating zone of $30-150^\circ\text{C}$ for about 1-60 seconds. By this heat setting, it is possible to prevent changes in the measurements of the film obtained that might otherwise occur in the high temperatures of summer. After stretching of the film, but either before or after its heat setting, it is possible to cause stretching to a fixed extent. In that case, it is possible to stretch the film to a length 70% of the previous film length. In particular, when stretching is in the main direction of stretching, it is better for there not to be stretching in the non-shrinking direction (the direction at right angles to the main direction of shrinkage).

Furthermore, after the stretching mentioned above, an additional step of cooling the film while the film is being stressed under a stretched or tensed condition, or of the continued cooling of the film subsequent to the said treatment, after the tension has been removed, makes it possible to obtain a film with more satisfactory and more stable shrinkage properties.

The thermo-shrinkable polyester film obtained in this way has a heat-shrinkage ratio of 30% or more in a certain direction at the temperature of 100°C. Then, the heat-shrinkage ratio in the direction at right angles to the said direction is extremely small. The proportion of the shrinkage ratio in the direction at right angles to the certain direction mentioned above to the shrinkage ratio in the said certain direction can be measured as described below and is defined as a "transformation ratio." The film of this invention has a transformation ratio of 0.175 or more.

In addition, the film of this invention has a shrinkage ratio at the point of intersection of 5% or more. The shrinkage ratio of the film at the point of intersection can be defined as the shrinkage ratio at the point of intersection of the following two curves that express the properties of the film:

1. A curve (solid line in FIG. 1) that expresses the relationship of the shrinkage ratio (i.e., the ratio of the length of shrinkage, $L_0 - L_1$ to the original length of the film L_0) and the strength of the internal residual stress of the film when a film with a fixed length L_0 is held loosely at a fixed interval L_1 (where $L_1 < L_0$), and then heat-shrunk; and

2. A curve (dotted line in FIG. 1) that expresses the relationship of the reexpansion ratio (i.e., the ratio of the pulling length, $L_2 - L_3$ to the length of the heat-shrunk film L_3) and the pulling strength when a film has been heat-shrunk at a fixed length L_3 ($= L_0/2$), and then pulled back to the fixed length L_2 ($L_0 > L_2 > L_3$).

A detailed explanation of the method for measurement of this shrinkage ratio at the point of intersection will be given by reference to the examples described below.

When a film is shrunken to a shrinkage ratio that is less than the shrinkage ratio at the point of intersection of the film, for example, even when the shrinkage of the film is not uniform, there being shrinkage spots because of the localized application of heat, these spots of shrinkage spontaneously disappear. The reason is that the strength of the internal shrinkage stress of the film is larger than that of the tensile stress thereof at the localized areas of shrinkage. The heat-shrinkable film of this invention has a shrinkage ratio of at least 5% at the point of intersection, and it is possible to cause uniform shrinkage of such a film within a wide range of shrinkage ratios. With a film that has a shrinkage ratio of less than 5% at the point of intersection, the internal residual stress is released by slight shrinkage, so there is not enough internal residual stress to cause the other spots of shrinkage to disappear. That is, once spots of shrinkage have occurred, they remain.

The film obtained in this way has a surface orientation coefficient preferably in the range of 40×10^3 to 120×10^3 . If the surface orientation coefficient is less than 40×10^3 , the shrinkage properties described above do not appear. That is, when the film is treated by the application of heat, wrinkling appears, colored spots develop, slackening occurs upon the application of heat, and other problems can occur. Also, at the time of thermo-shrinking or after thermo-shrinking, if the film is treated with heat such as boiling, retorting, and disinfection by hot water, then there is marked whitening of the film, which results in a poor appearance, because the polymers are oriented randomly. On the other hand, if the coefficient is greater than 120×10^3 , the strength of the film decreases, and even slight injury of the film can readily cause tearing. For example, if the film is wrapped around the outside of a bottle in order to reinforce it, the reinforcement effect is slight.

The birefringent index is preferably in the range of 20×10^3 to 175×10^3 . When the birefringent index is less than 20×10^3 , the shrinkage ratio at the point of intersection is low. When such a film is treated by heat, wrinkling and spots of coloration from metallic inks appear. On the other hand, if the birefringent index is greater than 175×10^3 , the speed of shrinkage during the application of heat becomes too fast. In this situation, the difference in temperature in places that are close to the heat source and those that are far from the heat source, or the difference in temperature in places reached by a warm draft and those without such a draft can cause shrinkage defects. In other words, spots of shrinkage are very readily formed.

The thermo-shrinkable polyester film provided by this invention in this way can have its surface printed as necessary. By heat-shrinkage, the film can be put to all kinds of uses such as for covering, parceling, wrapping etc.

Examples

This invention will be explained by reference to the following examples. The methods for measurement in these examples were as follows.

(1) Haze

Haze was measured according to the method of JIS-K 6714.

5

(2) Heat-shrinkage ratio

A sample of film 15 mm wide was cut off, and a pair of index lines with a spacing of 200 mm between them were marked at right angles to the long direction of the sample. This sample was heated with hot air
10 at a fixed temperature (either 80°C or 100°C) for one minute, and the shrinkage ratio was measured.

(3) Shrinkage ratio at the point of intersection (%)

15 A sample of film measuring 20 mm across and 150 mm long is obtained, and a pair of index lines with a spacing of 100 mm between them are marked at right angles to the long direction of the sample. A distance L_1 that is smaller than 100 mm and larger than 50 mm is established freely between a pair of chucks of a tension tester. Between these chucks, the film mentioned above (the sample) is placed and fixed at the index lines. This film is exposed to a hot blast of air at 100°C to shrink it. The strength of the
20 shrinking force is measured, and the residual shrinkage stress is obtained by use of the following equation.

Residual shrinkage stress

= shrinkage force/sectional area

The shrinkage ratio at that time is calculated by use of the following equation.

25

$$\text{Shrinkage ratio} = \frac{100 - L_1}{100} \times 100 (\%)$$

30

The value for L_1 is changed, and the measurements above are repeated; from the results, curve 1 (solid line in FIG. 1), which expresses the relationship between the shrinkage ratio and the strength of residual stress, is drawn.

35

Next, a new film is prepared in the same way as described above, and a pair of index lines with a spacing of 100 mm between them at the right angles to the long direction of the film are marked. An interval of 50 mm is established between a pair of chucks of a tension tester, and the film mentioned above is fixed at its lines by the pair of chucks. The fixed film is exposed to a hot blast of air at 100°C to shrink it. A distance L_2 that is larger than 50 mm and smaller than 100 mm is chosen freely, and the strength needed
40 to pull the shrunk film back to the length of L_2 is measured. With use of these results, the tensile strength is calculated by the following equation

Tensile strength = pulling strength/sectional area

The reexpansion ratio at that time is calculated by the use of the following equation.

45

$$\text{Reexpansion ratio} = \frac{L_2 - 50}{50} \times 100 (\%)$$

50

The value for L_1 is changed and the measurements above are repeated; from the results, curve 2 (dotted line in FIG. 1), which expresses the relationship between the tensile strength and the reexpansion ratio, is drawn. The shrinkage ratio that corresponds to the point of intersection of the curves 1 (showing the internal residual stress of the film) and 2 (showing the tensile stress of the film) mentioned above is the shrinkage ratio at the point of intersection.
55

(4) Retention time of residual stress by heat shrinkage (at 50% relaxation)

By a method similar to that mentioned above in section 3 for obtaining the tensile strength, a film is attached to a pair of chucks and exposed to a hot blast of air at 170 °C. The time needed for the shrinkage stress to reach zero is measured.

(5) Transformation ratio

Film that had not been stretched and that was 200 μm thick was cut into a fixed size, and stretched to four times the original length in a certain direction at the temperature of the glass transition point plus 25°C. The length of the unstretched film in the direction of stretching was A₁, and the length of the stretched film in this direction was A₂. The length of the unstretched film in the direction at right angles to the direction of stretching was B₁, and the length of the stretched film in this direction was B₂.

The transformation ratio was defined as the proportion of transformation as shown in the following equation.

$$\text{Transformation ratio} = \frac{\frac{B_1 - B_2}{B_1}}{\frac{A_2 - A_1}{A_1}}$$

(6) Glass transition point

The glass transition point was measured by use of a differential scanning calorimeter (internal heat DSC, Rigaku Denki) with a rise of 10°C per minute.

(7) Birefringent index and surface orientation coefficient

The birefringent index Δn and surface orientation coefficient A₀ of film were evaluated from the following equations:

$$\Delta n = |n_x - n_y|, \text{ and}$$

$$A_0 = \frac{n_x + n_y}{2} - n_z$$

wherein n_x is the refractive index of the film in the main direction of stretching; n_y is the refractive index thereof in the direction at right angles to the main direction; and n_z is the refractive index thereof in the direction of film thickness. Here, these refractive indices were measured with an Abbe refractometer.

Example 1

One hundred parts by mole of terephthalic acid as the dibasic acid component, 187 parts by mole of ethyleneglycol and 23 parts by mole of neopentyl glycol as the glycol components, and 0.05 mole of antimony trioxide as a catalyst (with respect to the acid component) were put into a stainless-steel autoclave, where polycondensation was done by the direct esterification method. The intrinsic viscosity of the resulting copolymers was 0.75 dl/g. This polyester was fusion-extruded at 300°C to give a film 180 μm

thick. The transformation ratio of this film was 0.181.

This unstretched film was heated for 8 seconds at 130°C, and then kept at 88°C for half of the desired total stretching process, after which it was stretched along its width at 80°C, so that it became 5.2 times as long as the original length of the film. After being stretched, the film was cooled at 40°C while being stretched along its width so that the stretched length of the width was about 3% of the previous width. The thickness of the film that was obtained was 40 μm ; its birefringent index was 105×10^3 , and its surface orientation coefficient was 68×10^3 .

The physical properties of this thermo-shrinkable film are described in Table 1. From this table, it can be seen that the heat-shrinkage characteristics of this heat-shrinkable film are excellent. When this heat-shrinkable film was used to cover a bottle in a practical test, the results were satisfactory.

Examples 2 and 3 and Comparative Examples 1-3

The acid components and glycol components shown in Table 1 were used to prepare polyester as described in Example 1. To 80% by weight of this polyester, 40% by weight of polyethylene terephthalate (limiting viscosity, 0.8 dl/g) was added to give polyester compositions (Examples 2 and 3).

The composition used in Comparative Example 1 consists of polyethylene terephthalate with an intrinsic viscosity of 0.6 dl/g. The composition used in Comparative Example 2 consists of polyester that was prepared from the acid components and glycol components shown in Table 1 as described in Example 1. The composition used in Comparative Example 3 consists of polyvinyl chloride.

The transformation ratio of the compositions for Example 2, Example 3, Comparative Example 1, and Comparative Example 3 were 0.177, 0.183, 0.170, and 0.174, respectively. These compositions were used and measured by the methods described in Example 1 for Examples 2 and 3. The surface orientation coefficient of film was 71×10^3 for Example 2 and 60×10^3 for Example 3. The birefringent index was 107×10^3 for Example 2 and 104×10^3 for Example 3. In Comparative Example 1, an unstretched film was stretched 4.2 times the width of the original sample at 95°C and cooled at 40°C. The surface orientation coefficient of the film that was obtained was 45×10^3 , and the birefringent index was 72×10^3 . These physical properties are shown in Table 1. Table 1 shows that the films of Examples 2 and 3 have high shrinkage ratios at the point of intersection, and it can also be seen there that maintenance of remaining stress was satisfactory. The heat-shrinkage ratio of the direction at right angles to the main shrinkage direction was low, and no wrinkling at all was seen in places with much shrinkage. When the surface of the film was printed with metallic ink, no spots of coloration were found.

When the film obtained was used to cover a polyester bottle, it followed the shape of the polyester bottle without fail so as to cover the bottle tightly. This film did not curve in a particular direction, nor did it give rise to undulation-like wrinkles. On the contrary, the film of Comparative Example 2, with its low shrinkage ratio at the point of intersection, had a high thermo-shrinkage ratio of the direction at right angles to the main direction of shrinkage. When this film was used to cover a polyester bottle as mentioned above, the area at the top of the bottle where the diameter was small was covered with film that, because of its high shrinkage, had wrinkles and spots of coloration; also, the film had undulation-like wrinkles at the upper and lower portions thereof. The outer appearance was very unsatisfactory, and the product could not be used commercially.

Examples 4-6 and Comparative Examples 4 and 5

The same composition as in Example 3 was used, and the stretching ratio was changed to have various values to give films with the shrinkage ratio at the point of intersection shown in Table 1. The surface orientation coefficients of the films were 73×10^3 , 75×10^3 , 79×10^3 , 38×10^3 , and 34×10^3 . The birefringent indices were 108×10^3 , 113×10^3 , 116×10^3 , 37×10^3 , and 33×10^3 . The physical properties of the films and the results of tests for a practical use are shown in Table 1.

Table 1 shows that the finished results of the areas with a high degree of stretch were poor when the shrinkage ratio at the point of intersection was low, and that the portions of the film printed with metallic ink gave rise to colored spots.

Comparative Example 6

Polyester was prepared following the methods of Example 1 with the use of terephthalic acid (100 parts by mole) as the acid component and of ethylene glycol (50 parts by mole) and neopentylglycol (50 parts by mole) as the glycol components. This polyester was used to make a film by the methods of Example 1. The heat-resistance of the polyester was low, so that when the film was stretched by the use of tenter, the clipped areas thereof were ripped, making it difficult to prepare the film.

10 Example 7

The same copolymers as obtained in Comparative Example 6 were used to prepare a composition that was mixed with 15 percent by weight of ethylene terephthalate. With the use of this material, a film was obtained, and stretched under the same conditions as in Example 1. The surface orientation coefficient of the resulting heat-shrinkable film was 69×10^3 , and its birefringent index was 118×10^3 . This film had satisfactory characteristics, as shown in Table 1.

Examples 8-13

20

With the use of the compositions shown in Table 1, films were prepared under the same conditions as in Example 1. The notations A to E in the column "Other glycol components" shown in Table 1 refer to the following compounds:

- A: 2,2-diethyl-1,3-propanediol
- 25 B: 2-ethyl-2-n-butyl-1,3-propanediol
- C: 2,2-bis(4-hydroxymethoxyphenyl)propane
- D: bis(4-hydroxyethoxyphenyl)sulfone
- E: bis[3,5-dimethyl-(4-hydroxyethoxyphenyl)]-sulfone

The physical properties of the thermo-shrinkable films obtained were as shown in Table 1. Table 1 shows that in all of the tests of practical uses when these films were used, the results obtained were satisfactory.

35

40

45

50

55

Table 1 (a)

Polyester composition	Acid components in other polyesters (mol%)	Glycol components in other polyesters (mol%)	Example			Comparative Example			Example		
			1	2	3	1	2	3	4	5	6
			0	40	40	100	0	0	40	40	40
			100	60	60	0	100	0	60	60	60
			100	100	100	0	90	0	100	100	100
Transformation ratio	Stretching ratio	0.181	0.177	0.183	0.170	0.174	—	0.193	0.193	0.193	
5.2	5.2	5.2	4.2	4.6	—	5.4	5.4	5.4			

Table 1(a) (contd.)

				Comparative Example			Example						
				4	5	6	7	8	9	10	11	12	13
Polyester composition	Polyethylene terephthalate (wt%)			40	40	0	15	0	50	50	0	0	0
	Other polyesters (wt%)			60	60	100	85	100	50	50	100	100	100
	Acid components in other polyesters (mol%)	Terephthalic acid		100	100	100	100	100	100	100	100	100	100
		Isophthalic acid		0	0	0	0	0	0	0	0	0	0
		Ethylene glycol	65	65	50	50	80	70	70	80	80	80	80
	Glycol components in other polyesters (mol%)		35	35	50	50	0	0	0	0	0	0	0
	Other glycol components		0	0	0	0	A 20	A 30	B 30	C 20	D 20	E 20	
	Transformation ratio			0.193	0.193	0.197	0.195	0.191	0.179	0.182	0.188	0.185	0.190
Stretching ratio				4.0	3.5	4.0	5.1	5.2	5.2	5.2	5.4	5.2	5.2

Table 1 (a)

	Example			Comparative Example			Example		
	1	2	3	1	2	3	4	5	6
Heat-shrinkage ratio	Base (%)								
	Main direction of stretching 80°C (%)								
	Direction at right angles 80°C (%)								
	Main direction of stretching 100°C (%)								
Shrinkage ratio at the point of intersection	Direction at right angles 100°C (%)								
	Shrinkage ratio at the point of intersection								
	Residual stress retention time								
	Shrinkage spots (neck of bottle)								
Practical applications	Colored spots (with use of metallic ink)								
	Uniformity of label								
	Fitness of label								
	Appearance after heat treatment a)								
	Test with dropping of bottle b)								
		Without heat treatment	After heat treatment						

a : at 125°C for 30min.
b : dropped 75cm

Table 1(b) (cont'd.)

Heat-shrinkage ratio	Comparative Example				Example								
	4	5	6	7	8	9	10	11	12	13			
Heat-shrinkage ratio	Base (%)	1.8	1.9	—	1.7	1.6	1.5	1.6	2.2	2.8	3.2		
	Main direction of stretching 80°C (%)	5.9	10.5	—	3.8	-2.0	-2.5	-3.0	-1.5	1	-2.1		
	Direction at right angles 80°C (%)	33	22	—	46	46	44	49	40	47	39		
	Main direction of stretching 100°C (%)	8.6	13.6	—	2.1	-1.5	-1.8	-2.1	-0.5	2.0	-1.1		
Shrinkage ratio at the point of intersection	Direction at right angles 100°C (%)	45	58	—	62	72	74	71	73	62	55		
	Shrinkage ratio at the point of intersection	3	45	—	11	20	25	30	26	18	16		
	Residual stress retention time	2 min. or more	10 min. or more	—	9 min. or more	10 min. or more	10 min. or more	9 min. or more	10 min. or more	10 min. or more	10 min. or more		
	Shrinkage spots (neck of bottle)	○	△	—	○	○	○	○	○	○	○		
Practical applications	Colored spots (with use of metallic ink)	△	△	—	○	○	○	○	○	○	○		
	Uniformity of label	△	△	—	○	○	○	○	○	○	○		
	Platen of label	△	x	—	○	○	○	○	○	○	○		
	Appearance after heat treatment "	△	x	—	○	○	○	○	○	○	○		
Test with dropping of bottle "	Without heat treatment	○	△	—	○	○	○	○	○	○	○		
	After heat treatment	△	x	—	○	○	○	○	○	○	○		

a : at 125°C for 30 min.

b : dropped 75 cm


It is understood that various other modifications will be apparent to and can be readily made by those skilled in the art without departing from the scope and spirit of this invention. Accordingly, it is not intended that the scope of the claims appended hereto be limited to the description as set forth herein, but rather that the claims be construed as encompassing all the features of patentable novelty that reside in the present invention, including all features that would be treated as equivalents thereof by those skilled in the art to which this invention pertains.

10 Claims


1. A thermo-shrinkable polyester film obtained from a composition that comprises acid components including telephthalic acid and glycol components including ethyleneglycol, wherein said film has a heat-shrinkage ratio of 30% or more in a certain direction at 100°C, and has a shrinkage ratio of 5% or more at the point of intersection of a curve showing the internal shrinkage stress of said film and a curve showing the tensile stress of said film.

2. A thermo-shrinkable polyester film according to claim 1, wherein said film has a transformation ratio of 0.175 or more.



3. A thermo-shrinkable polyester film according to claim 1 or 2, wherein said glycol components include the compounds with the following general formulae (I) and/or (II) in the range of 3 to 65 percent by mole based on total moles of glycol components:

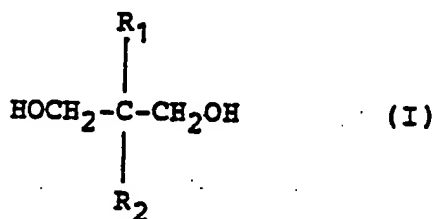

wherein R_1 and R_2 are independently C_1 - C_5 alkyl,

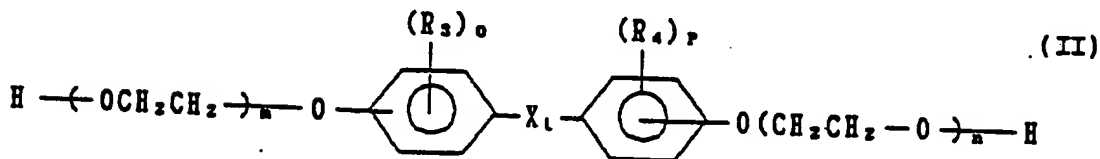

or

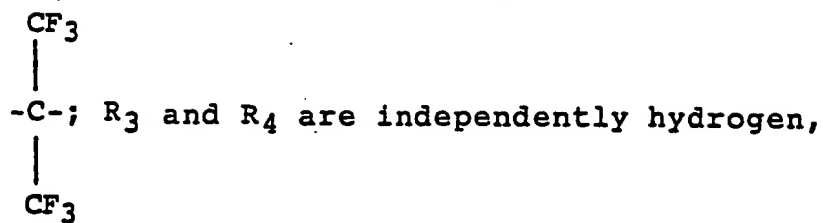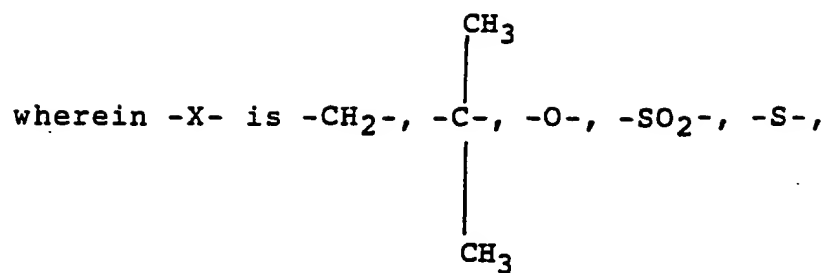

C_1 - C_5 alkyl, or halogen; l is 0 or 1, m and n are both an integer of 1 to 5; o and p are both an integer of 1 to 4.

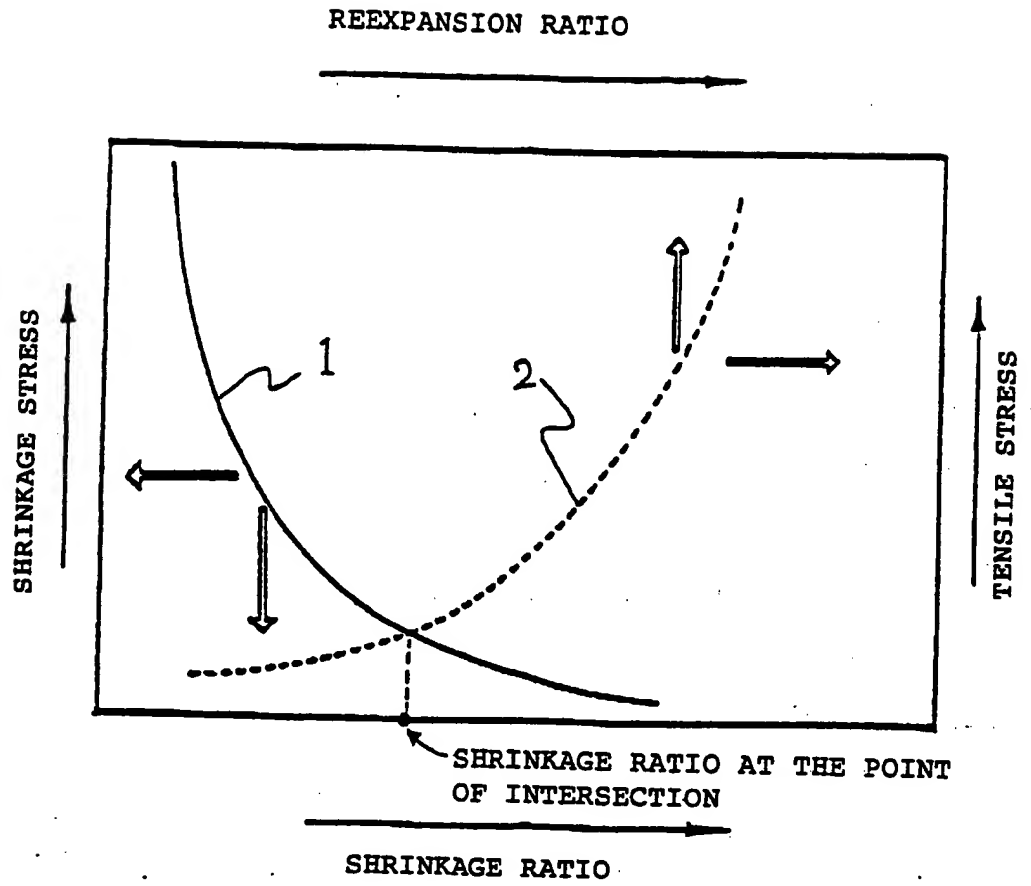


FIG. 1



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 271 928
A3**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 87118863.7

(51) Int. Cl.⁴: C08J 5/18 , C08G 63/66 ,
C08G 63/18

(22) Date of filing: 18.12.87

(30) Priority: 19.12.86 JP 305083/86
29.12.86 JP 313318/86
25.06.87 JP 159412/87
25.11.87 JP 296890/87
25.11.87 JP 296891/87
18.12.87 JP 322217/87

(4) Date of publication of application:
22.06.88 Bulletin 88/25

(84) Designated Contracting States:
DE GB

(88) Date of deferred publication of the search report:
13.12.89 Bulletin 89/50

(71) Applicant: Toyo Boseki Kabushiki Kaisha
No 8, DojImahamadouri 2-chome Kita-ku
Osaka-shi, Osaka-fu(JP)

(72) Inventor: Yoshinaka, Yasuo
192-146, Takashiro Shiga-cho
Shiga-gun Shiga-ken(JP)
Inventor: Kuze, Katsuaki
360-80, Mano-cho
Shiga-ken(JP)
Inventor: Isaka, Tsutomu
2-1-4, Shinooka
Komaki-shi Aichi-ken(JP)
Inventor: Yamashita, Toshihiro
344, Aza Maehata Oaza Kizu
Inuyama-shi Aichi-ken(JP)
Inventor: Matsuyama, Yujiro
2-2-609, Nionhama 2-chome
Otsu-shi Shiga-ken(JP)
Inventor: Nakamura, Koichiro
270-8, Waninaka Shiga-cho
Shiga-gun Shiga-ken(JP)
Inventor: Matsunaga, Tsuyoshi
57-47-1, Sada Mihama-cho
Mikata-gun Fukui-ken(JP)
Inventor: Makimura, Osamu
1812-5, Miwa-cho
Ogaki-shi Gifu-ken(JP)

(74) Representative: Vossius & Partner
Siebertstrasse 4 P.O. Box 86 07 67
D-8000 München 86(DE)

EP 0 271 928 A3

(54) Thermo-shrinkable polyester film.

(57) A thermo-shrinkable polyester film of this invention is obtained from a composition that comprises acid components including terephthalic acid and glycol components including ethyleneglycol. The polyester film has a heat-shrinkage ratio of 30% or more in a certain direction at 100 °C, and a shrinkage ratio

of 5% or more at the point of intersection of a curve showing the internal shrinkage stress of the film and a curve showing the tensile stress of the film.



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
X	US-A-4 020 141 (J.M. QUINN) * Abstract; claims * ---	1-3	C 08 J 5/18 C 08 G 63/66 C 08 G 63/18
X	FR-A-1 303 845 (HOECHST) * Page 1, column 2; page 3, column 3 * ---	1-3	
X	GB-A- 977 104 (HOECHST) * Page 2, lines 79-125; claim 1 * ---	1-3	
X,Y	GB-A- 793 907 (BASF) * Page 2 * ---	1-3	
Y	FR-A-1 438 863 (ALPINE CHEMISCHE AG) * Claim 1 * ---	1-3	
P,X	EP-A-0 210 646 (TOYO BOSEKI K.K.) * Abstract; page 11 * ---	1-3	
E	EP-A-0 267 799 (DIAFOIL) * Abstract; examples 5,6 * -----	1-3	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			C 08 J C 08 G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27-09-1989	Examiner SOMERVILLE F.M.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1501 GLEZ (P0401)